


How to use CSE® Deactivators:

Part 3: using them for „positive“ applications

i.e. CSE® Deactivator is sprayed onto the freshly poured/finished concrete surface.



First steps: test and select the right version and type of CSE® - cast concrete and trowel/finish the surface.


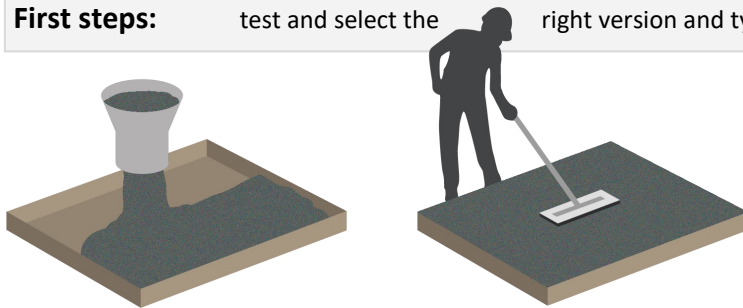


Please turn over for more information.





Let concrete set. Wash off. Ready.



Standard-Level: spray CSE® onto surface right after surface is trowelled.

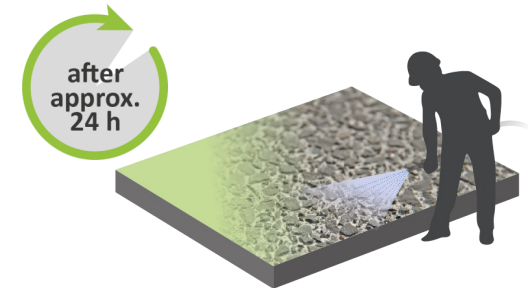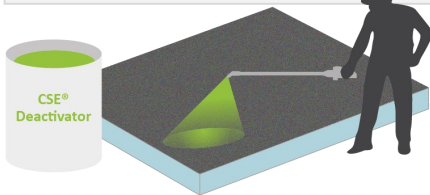


Pro-Level: seed in aggregates after trowelling - trowel again - spray CSE® onto surface.

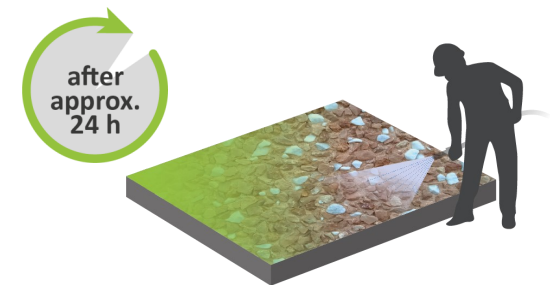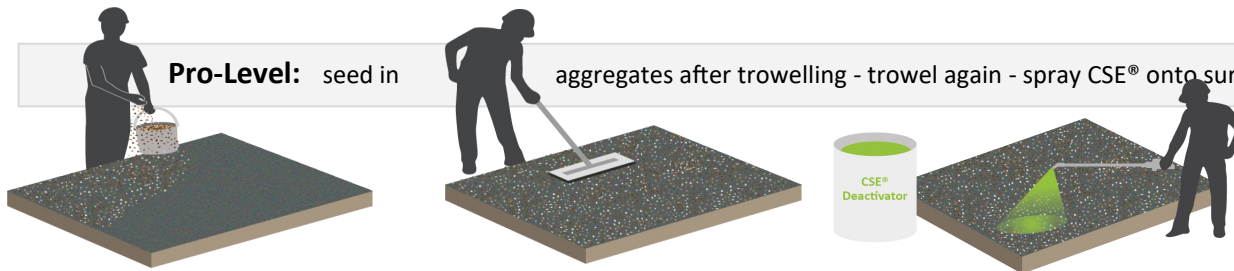

Expert-Level: seed in micro aggregate / hardener mix - trowel again - spray CSE® onto surface.

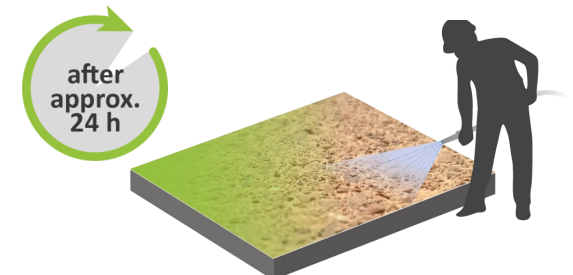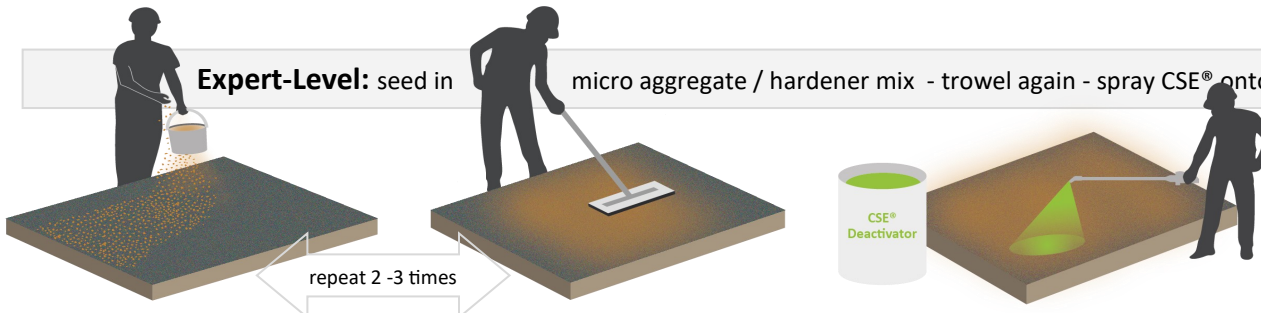

Examples: made with CSE® multitop / CSE® solotop

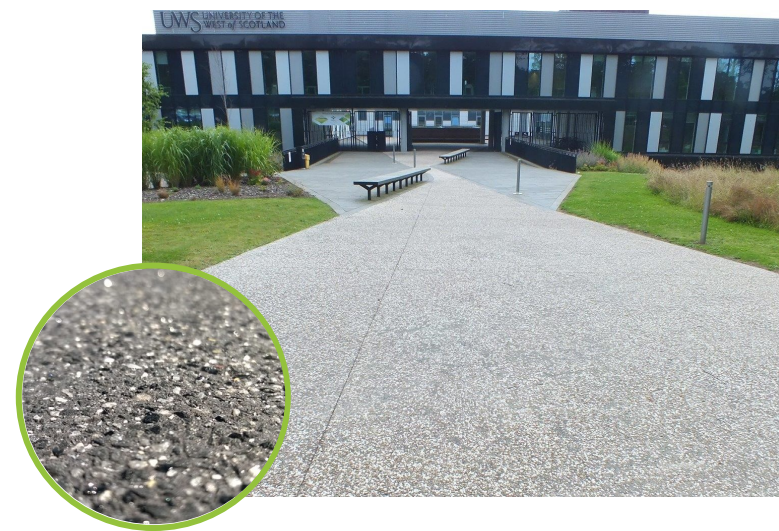

These graphs do not replace carefully reading the **CSE® Deactivator** technical data sheets available on www.hebau.com and carrying out pilot tests.



☒ suitable for this way of use / products have "use for all" characteristics

☒ ☒ Very suitable for this way of use / products have been developed for this application

